


Knox Rapid Access System security is enhanced with the Knox KeySecure® 3b, a keypad-controlled unit that keeps the department's master key locked in a visible position providing immediate accountability. Knox KeySecure 3b maintains a history of unit activity including when and who released the key. The KeySecure can still record date and time even if the faceplate has been removed or if the unit power has been disabled.

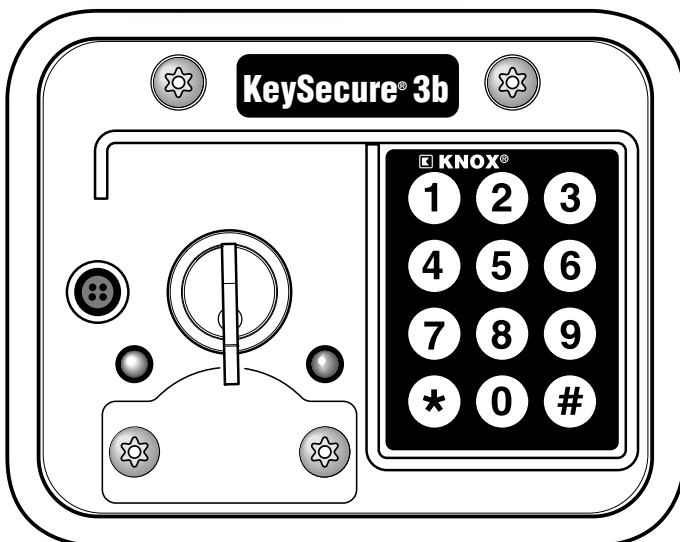

FEATURES

- ✓ Secures 1 mechanical key
- ✓ 2 MB memory stores 5,000 User PINs and 16,000 events
- ✓ Connects to PC USB port to collect device history (audit trail events) and user configuration
- ✓ User adjustable illuminated keypad to clearly display buttons for PIN code entry day or night (brightness level)
- ✓ Operates on any 12 VDC 3 A supply (50 mA standby)
- ✓ Multiple programming options for key release
- ✓ Automatically re-locks key after configurable release period (3 to 20 seconds) expires
- ✓ Tamper Monitor, with or without 12 V power

BENEFITS

- ✓ Reduces liability of lost keys
- ✓ Utilizes software to configure devices, manage users and retrieve audit trail information
- ✓ Manages accountability, recording key releases

OPTIONS

- ✓ 90 and 60 degree mounting bracket options
- ✓ Strobe light signaling key removal (available in blue, red or amber)

PRODUCT SPECIFICATIONS

Operating Temperature: -40 C to +85 C (-40 F to 185 F)

Storage Temperature: -60 C to +90 C (-76 F to 194 F)

Power: 12 to 15 volts DC @ 3 amps


Initial Power Stabilization Time: 5 seconds

Construction: 1/4" plate steel


Product Weight: 10 lbs.

Product Dimension: 5" W x 4" H x 4-1/2" D

Finish: Powder coating

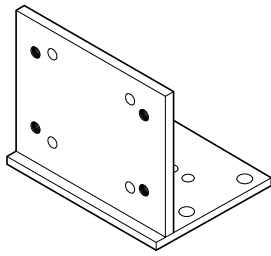

90° Bracket

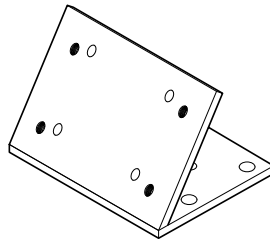


60° Bracket



90° Bracket Mounting Configurations



60° Bracket Mounting Configurations

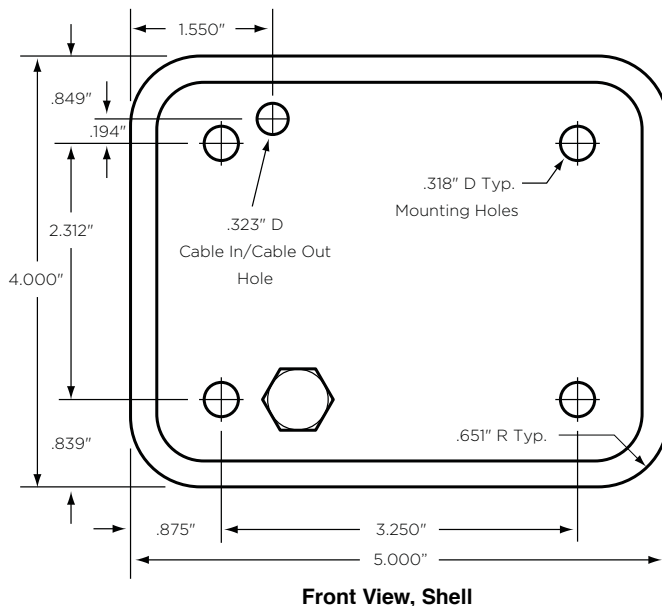

MOUNTING INFORMATION

Use at least four 5/16" diameter grade 5 mounting fasteners (Screen/Carriage Bolts, etc.) to mount housing to vehicle. Do not let fasteners extend too far into the housing (3/8" maximum).

Optional Mounting Brackets: Two mounting brackets are available in 90 and 60 degree versions for mounting KeySecure devices in a variety of positions

SYSTEM REQUIREMENTS

PC Minimum requirements:

- Windows 7 or higher operating system
 - 32 bit or 64 bit OS
 - CD ROM and 200 MB of free disk space
 - Monitor, at least 1024x768 pixels or higher
 - At least one USB port for communication with KeySecure unit
- Administrator software (required) with a Knox USB Cable
- Optional AC adapter to power unit when KeySecure not mounted in vehicle. Great for testing, initial setup and communication with PC.

SYSTEM MODEL REFERENCE

Model Description

2650	KeySecure 3b USB with Audit Trail
2651	KeySecure 3b USB with Blue Strobe & Audit Trail
2652	KeySecure 3b USB with Red Strobe & Audit Trail
2653	KeySecure 3b USB with Amber Strobe & Audit Trail
9001	Administrator Software with USB Cable
2668	Mounting Bracket 90° Angle
2696	Mounting Bracket 60° Angle
91088	Data Cable for KeySecure USB
1031	Radio Tech Key
2680	Wall Mount 12 VDC AC Adapter

ABOUT KNOX COMPANY

Over forty years ago, a unique concept in rapid access for emergency response was born. The KnoxBox®, a high-security key lock box, was designed to provide rapid access for emergency responders to reduce response times, minimize injuries and protect property from forced entry.

Today, one revolutionary lock box has grown into a complete system providing rapid access for public safety agencies, industries, military, and property owners across the world. The Knox Company is trusted by over 14,000 fire departments, law enforcement agencies, and governmental entities.

KNOX COMPANY

1601 W. DEER VALLEY RD
PHOENIX, AZ 85027

T. 800.552.5669
F. 623.687.2290

KNOXBOX.COM

INFO@KNOXBOX.COM